

FT-281 St. Remy Fountain

Two people are recommended for the installation of this fountain!



YARDART

117-C Town and Country Drive
Danville, California 94526

866-382-8600

info@yardart.net



FOUNTAIN INFORMATION:

This fountain holds approximately 30 gallons of water.

**This fountain uses a medium fountain cover.
(FTNCOV-MED)**

**Compatible with Refill #10 Devise and LED Kits
(A different style stopper may be requested for the refill kit.)**

Pump Kit Parts List

PK800 pump (1)
#10 stopper (1)
7 drain stopper
Approx. 12" length of 1/2" Black Non-kink tubing (1) **
2" length of 5/8" clear vinyl tubing (2) **
2" length of 3/4" clear vinyl tubing (1) **
2" length of 1/2" PVC pipe (1) **
Wedges (3)
Hose clamps (2)

* Hose clamps may be used as flow restrictors
**Tubing is preassembled

TOOLS REQUIRED:

Bubble Level



PUMP INFORMATION:

**OEMPP800 - 800 GPH Pump
16 FT cord length**

- W I N T E R C A R E -

Fountain bowls/tops and other fountain components, which collect water, should not be left outside in the winter since any component, which fills with water and freezes may crack. Likewise, components such as pedestals, which remain in a basin, filled with water, which then freezes, may also crack or crumble. Ideally, therefore, a fountain should always be stored indoors or in a dry protected place such as a covered porch away from the elements. However, if a fountain must be left outside:

- (1) Remove pump, rubber stoppers, drainpipes, finials, and other small components for storage indoors. Note that stoppers or drainpipes are removed to allow drainage in the event water accumulates in any basin.
- (2) Raise fountain base from ground with wood strips so that base will not freeze to the ground surface.
- (3) Cover or wrap the fountain with burlap or other absorbent material (old blanket or towel) and then cover securely with plastic, making sure that water will not accumulate in the basin or other fountain component and freeze;
- (4) Check fountain periodically to ensure that plastic is secure and water is not accumulating in any fountain component.

- G E N E R A L F O U N T A I N T I P S -

Install fountains on a level surface. You will need a properly grounded 110-volt (AC only) GFCI protected receptacle near the fountain for your pump. All pumps are submersible and must be completely underwater to function properly. Test all pumps and adjust to full output prior to assembly. It is not recommended that fountains be placed directly on grass or dirt. Position the channel opening at the base of each fountain toward the electrical outlet to be used since the pump cord will be threaded through this opening.

All of our cast stone is proudly




Made in USA


FT-281 St. Remy Fountain

Two people are recommended for the installation of this fountain!


Assemble your fountain on a level surface capable of holding a minimum of 825 pounds with an approximate 4 square foot footprint.

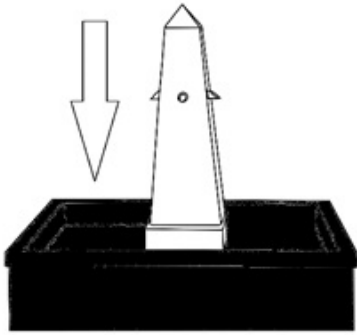


FT-281D (572 lbs)
46.5"L x 46.5"W x 11"H

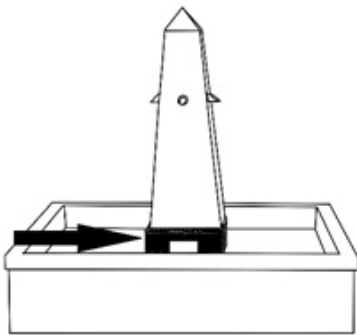

FT-281B (57 lbs)
11.5"L x 11.5"W x 9.75"H

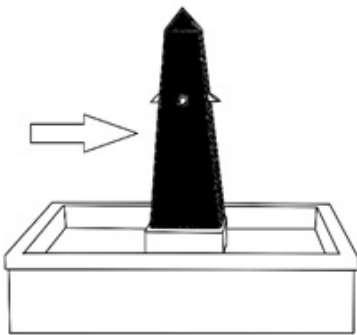


FT-281A (175 lbs)
10.5"L x 10.5"W x 37"H

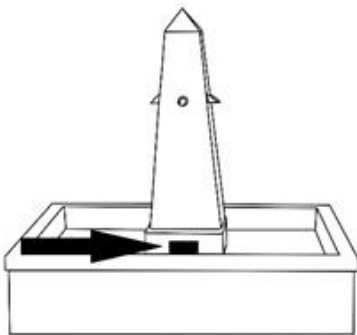

FT-281C (3 lbs)
6.75"L x 2.25"W x 5.75"H


1. Position the basin (FT-281D) where the fountain is to be installed, ensuring that it is level.
2. Assemble the fountain plumbing
 - a. Connect the preassembled tubing to the pump by sliding the 3/4" clear tubing over the pump outlet.
 - b. Place the stopper around the pump cord approximately 8 inches from the pump.
3. Feed the pump cord all the way through the hole in the basin and run the cord through the channel in the bottom to ensure the fountain will be level.
4. **FIRMLY** press the stopper into the hole evenly.
 - a. Note: Using the handle of a screwdriver or hammer works best to press the stopper in place.
5. Place the pump cover (FT-281B) over the pump. Ensure it is placed properly and leveled.
6. Place the Water Feature (FT-281A) on top of the pump cover.
7. Insert the 2" PVC pipe that is connected to the non-kink tubing into the PVC coupling in the bottom of the water feature (FT-281A).
8. Ensure the water feature is centered and leveled on the pump cover.
9. Place the pump cover door (FT-281C) in the pump access opening of the pump cover.
10. Fill the fountain with water.

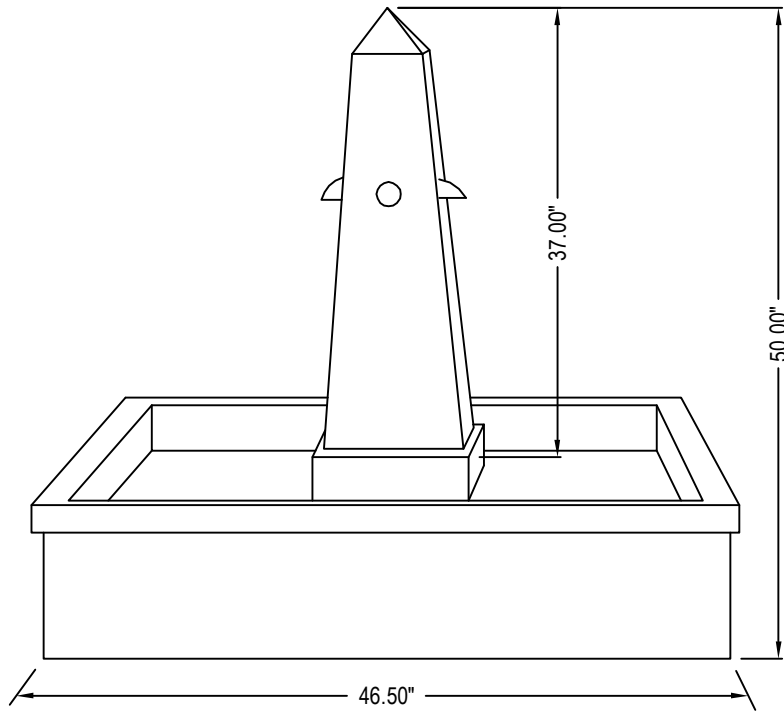

ST. REMY FOUNTAIN (FT-281)
WEIGHT: 807 LBS
DIMENSIONS: 46.50" W X 50.00" H

NOTES:

1. PLEASE REFER TO LISTING 4841-101 FOR PATINA OPTIONS.
2. INSTALLATION TO BE COMPLETED IN ACCORDANCE WITH MANUFACTURER'S SPECIFICATIONS.
3. DO NOT SCALE DRAWING.
4. THIS DRAWING IS INTENDED FOR USE BY ARCHITECTS, ENGINEERS, CONTRACTORS, CONSULTANTS AND DESIGN PROFESSIONALS FOR PLANNING PURPOSES ONLY. THIS DRAWING MAY NOT BE USED FOR CONSTRUCTION.
5. ALL INFORMATION CONTAINED HEREIN WAS CURRENT AT THE TIME OF DEVELOPMENT BUT MUST BE REVIEWED AND APPROVED BY THE PRODUCT MANUFACTURER TO BE CONSIDERED ACCURATE.
6. CONTRACTOR'S NOTE: FOR PRODUCT AND COMPANY INFORMATION VISIT www.CADdetails.com/info AND ENTER REFERENCE NUMBER 4841-314.



ESTATE COLLECTION

ST. REMY FOUNTAIN